

# Patrol CZ5001

## Portable Appliance Testers Test & Tag To AS/NZS 3760

•  
**AEGIS**

This portable appliance tester will perform the essential electrical safety tests required for portable appliances and equipment. It can be used to test domestic appliances, industrial appliances, power tools, powerboards and extension leads.



### The Aegis Patrol - CZ5001 consisting of:

#### CZ5000

- Fully portable - mains or battery operated
- Continuous self monitoring
- Single press DC testing
- Drop proof / weather proof case (IP67)
- Leads & sample tags included

#### CZ5500

- Leakage current measurement for 'Run testing' or 'Power up testing'
- Easy to use compact design
- Continuous measurement providing instant real time results
- Tests appliances which cannot be tested using a DC method



The CZ5000 and the CZ5500 can be purchased individually if required.

[www.aegis.net.au](http://www.aegis.net.au)

Australia 1300 723 447

[www.aegis.net.nz](http://www.aegis.net.nz)

New Zealand 0800 023 447



Manufactured under a Quality System complying to ISO9001 : 2000 (QEC Lic 5948)

### PATROL - CZ5001

Tests all Class 1 (Earthed) & Class II (Double Insulated) Appliances, Extension Leads and Power Boards.


#### TEST THRESHOLDS

Earth Continuity Test:	
Test Current:	200mA
Pass Threshold:	1 ohm or less
DC Insulation Test:	
250V DC test voltage:	Pass threshold - 1 Megohm or greater
500V DC test voltage:	Pass threshold - 1 Megohm or greater - 10 Megohm or greater
AC Earth Leakage Test:	
Thresholds:	0 - 1mA 1mA - 2.5mA 2.5mA - 5mA > 5mA

#### SPECIFICATIONS

Supply Voltage:	DC- 6 x 1.5V AA Alkaline Batteries. Battery life: 25 hours (typical) AC- 240V / 50Hz (Installation Cat2)
Temperature:	Operating 0°C to +50°C Storage -20°C to +70°C

#### APPLICABLE STANDARDS:

Tested to meet the requirements of: AS61010 / IEC 61010 / C-Tick 

#### STANDARD ACCESSORIES:

- Extension Lead Adaptor
- Test Lead (Probe & Clip)
- Instruction Manual
- Pass & Fail Test Tags

### ALSO AVAILABLE FROM AEGIS...

#### Portable RCD testers

Measuresafe 36A



- Automatic testing of Portable RCD's
- Tests and Displays Trip Current and Trip Time and Mains Voltage
- Reports Faults, i.e. Incorrect Mains Wiring & No Earth Connected
- Options: Current, Slope, Trip Time Adjustment and Test Result Storage

#### Test & Tag Accessories



- Aegis Pass tags in all colours
- Customised Pass Tags in all colours
- Fail /Danger Tags
- Log Books
- Electronic Data Capture & Reporting Solutions

#### Australia:

**Toll Free: 1300 723 447**  
sales@aegis.net.au

200 Rooks Road  
Vermont, Vic. Australia 3133

Tel: (61 3) 8872 6666  
Fax: (61 3) 8872 6678

[www.aegis.net.au](http://www.aegis.net.au)


#### New Zealand:

**Toll Free: 0800 023 447**  
sales@aegis.net.nz

Khyber Pass Business Centre  
4/195 Khyber Pass Road  
Grafton, Auckland, New Zealand

Tel: (64 9) 356 8293  
Fax: (64 9) 356 8292

[www.aegis.net.nz](http://www.aegis.net.nz)

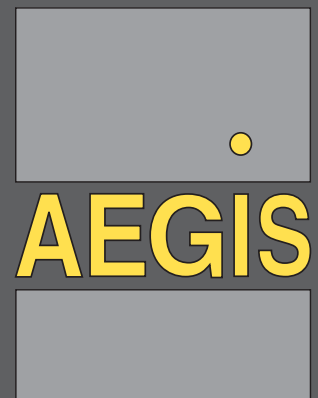

**Brisbane**

**Melbourne**

**Sydney**

**Auckland**